

Slip Rings

Modular	Construction system	SR085
----------------	----------------------------	--------------



In general slip rings are used to transmit power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The construction is modular and offers the greatest flexibility in a variety of applications.

Flexible and rugged

- Modular construction system, load and signal/data channels can be combined as desired.
- Rugged GFPC housing (glass-reinforced polycarbonate), 30% glass-fibre content for industrial usage.
- Long service life and long maintenance cycles.

Reliable with Safety-Trans™ Design

- Two-cavity system for load and signal transmission.
- Labyrinth seal.
- High vibration resistance.
- Fieldbus signals such as Profibus, CANopen etc. up to 12 Mbit/sec.

Applications

Packaging machines, textile machines, pipeline inspection systems, video surveillance equipment (CCTV), bottling plants, rotary tables

Standard models

Delivery time is 10 working days for a maximum of 10 pcs. per delivery. Larger quantities have a delivery time of 15 working days (or alternatively on request).



	Signal / data channels	Load channels	Contact material	Order-No.
Hollow shaft 25 mm [0.98"]	4 x	4 x	silver / precious metal	SR085-25-04-04-11301-V100
	6 x	6 x	silver / precious metal	SR085-25-06-06-11301-V100
Hollow shaft 30 mm [1.18"]	2 x	3 x	silver / precious metal	SR085-30-02-03-11301-V100
	6 x	6 x	silver / precious metal	SR085-30-06-06-11301-V100

Order code

SR085 - **XX** - **XX** - **XX** - **XXXXXX** - **V100**

Type **a** **b** **c** **d** **e** **f** **g** **h** **i**

Please note: non-standard models will be checked for availability - an alternative model may be proposed. Minimum order quantity 5 pieces for new models. Delivery time 20 to 25 working days. For list of all available types, see www.kuebler.com/sr-list

<p>a Type of mounting</p> <p>00 = flange mounting 20 = hollow shaft, ø 20 mm [0.79"] 24 = hollow shaft, ø 24 mm [0.94"] 25 = hollow shaft, ø 25 mm [0.98"] 30 = hollow shaft, ø 30 mm [1.18"] IN = hollow shaft, ø 1" (other options on request)</p> <p>b Number of signal/data channels¹⁾</p> <p>c Number of power (load) channels¹⁾</p>	<p>d Max. load current</p> <p>0 = no load channels 1 = 16 A, 240 V AC/DC 2 = 25 A, 240 V AC/DC 3 = 10 A, 400 V AC/DC 4 = 20 A, 400 V AC/DC</p> <p>e Mounting position</p> <p>0 = any, only with either load or signal channels 1 = standing and horizontal (flange down) 2 = hanging and horizontal (flange up)</p>	<p>f Contact material for signal/data channels²⁾</p> <p>0 = no signal channels 3 = silver / precious metal</p> <p>g Media lead-through</p> <p>0 = none</p> <p>only flange mounting (00):</p> <p>1 = air, connection 1/4" 2 = air, connection 1/2" 3 = air, connection 3/8" 4 = hydraulics, connection 1/2" 5 = hydraulics, connection 3/8"</p> <p>hollow shaft or shaft mounting:</p> <p>6 = air, rotatable connector (up to 300 rpm)</p>	<p>h Protection rating</p> <p>1 = IP50 2 = IP64</p> <p>i Version number (options)</p> <p>V100 = without options >V100 = Options on request, e.g.: - > 20 channels - other types of mounting - other types of connection e.g. plug connectors</p>
--	---	---	--


1) 20 combination max., for example 4 data channels and 16 load channels.
 2) Contact material gold/gold and copper/bronze on request.

Slip Rings

Modular	Construction system	SR085
----------------	----------------------------	--------------

Technical data (standard version)	
Overall length	dep. on the number of transmission paths
Hollow shaft diameter	up to \varnothing 30 mm [1.18"]
Voltage/current loading	
load channels	240 V AC/DC, max. 16 A (order option 1) 240 V AC/DC, max. 25 A (order option 2) 400 V AC/DC, max. 10 A (order option 3) 400 V AC/DC, max. 20 A (order option 4)
signal / data channels	48 V AC/DC, max. 2 A
Contact resistance	
load channels	$\leq 1 \text{ Ohm}$ (dynamic) ¹⁾
signal / data channels	$\leq 0.1 \text{ Ohm}$ (silver / precious metal) ²⁾
Insulation resistance	10^3 MOhm , at 500 V DC
Dielectric strength	1000 V eff. (60 sec.)
Speed max. (signal / data channels)	800 rpm, up to 10 channels (depends on installation position and numbers of channels)
Service life (signal / data channels)	typ. 500 million revolutions (at room temperature) depends on installation position
Maintenance cycles	first maintenance after 50 million revolutions, all further maintenance intervals after 100 million revolutions
Maintenance	contact oil not required
Material pairing	
load channels	copper / bronze
signal / data channels	silver / precious metal
Operating temperature	-35° ... +85°C [-31°F ... +185°F]
Protection	max. IP64
Transmission paths	max. 20 (> 20 on request)
Standards	EN 61010-1 2001, VDE 0110 part 1, VDE 0295/6.92, VDE 0100 part 523

Modular construction system

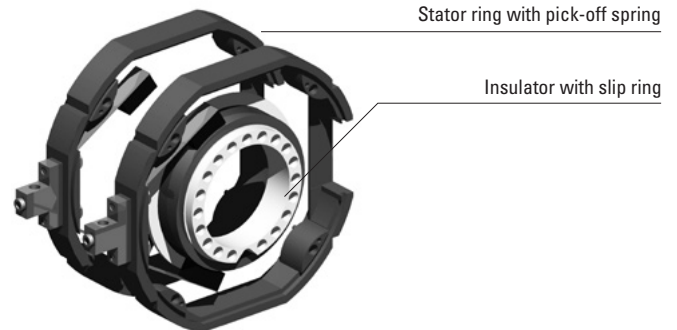

Technology in detail

Easily accessible connections



IP64 version with rotor and stator protective cover




Practical maintenance window



Hollow shaft mounting with rotatable connector (air)



Version with media lead-through (air, hydraulics)

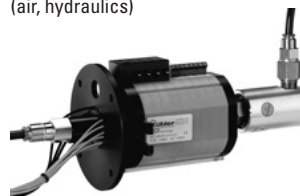

1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip Rings


Modular	Construction system	SR085
----------------	----------------------------	--------------

Dimensions

Dimensions in mm [inch]

Standard version


Example: Type SR085-25-02-03-11301-V100
(2 data channels, 3 load channels)

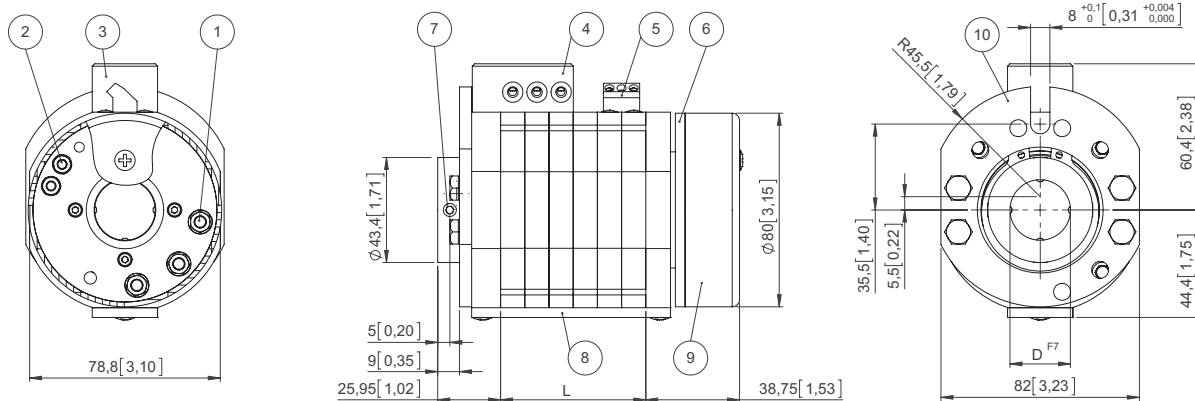

- | | | |
|--|---|--------------------------------------|
| 1 – Screw terminal M5 for load transmission | 4 – Wire lead-in for power possible on both sides | 8 – Maintenance window |
| 2 – Screw terminal M4 for signal transmission | 5 – Terminal clamp for signal transmission | 9 – Protective cover for connections |
| 3 – Terminal clamp for power without wire protection, with shock-hazard touch protection | 6 – Rotating connection ring | 10 – Torque stop |
| | 7 – 4 x socket set screw DIN 914 M6 | |

Air lead-through versions

Example: Type SR085-00-04-03-11322-V100

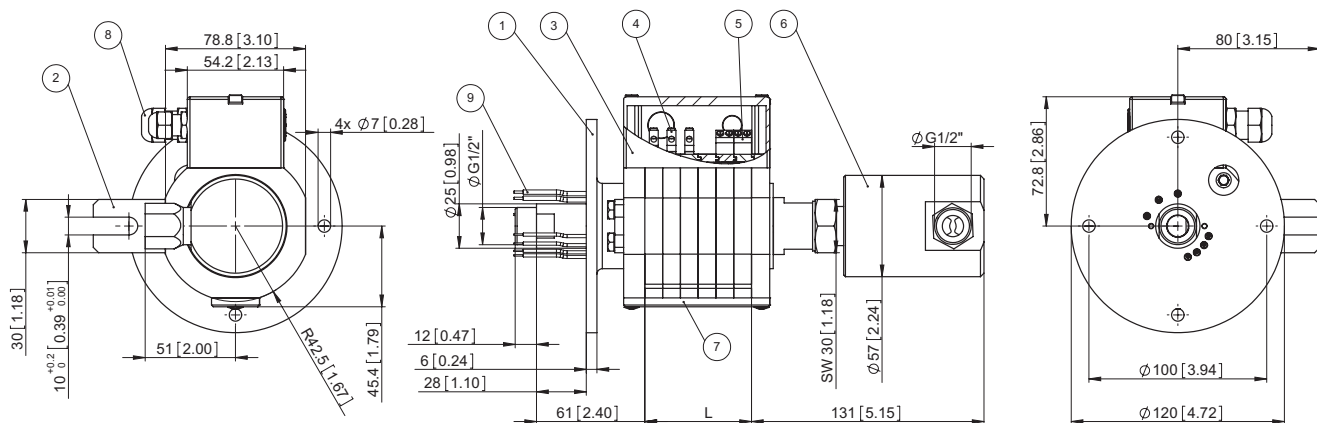

- | | | |
|-----------------------------|---------------------------|------------------------|
| 1 – Mounting flange | 4 – Terminal clamp power | 7 – Maintenance window |
| 2 – Torque stop | 5 – Terminal clamp signal | 8 – Cable gland |
| 3 – Stator protective cover | 6 – Media lead-through | 9 – Connection wires |

Calculation of the overall length

Basic dimensions	
slip ring with hollow shaft	64.5 mm [2.54"]
slip ring with flange mounting and media lead-through 1/2" or 3/8"	185 mm [7.28"]
slip ring with flange mounting and media lead-through 1/4"	168 mm [6.61"]
Additional dimensions	
+ number of signal/data channels (silver / precious metal)	+ 10 mm [0.39"] per data channels
+ number of load channels, order options 1 and 2	+ 10 mm [0.39"] per load channel
+ number of load channels, order options 3 and 4 (10 or 20 A, 400 V)	+ 20 mm [0.79"] per load channel, if only load + 10 mm [0.39"]
+ labyrinth isolation ring for load and signal transmission	+ 10 mm [0.39"]