

Incremental Encoders

Standard ATEX, SIL2 / PLd, optical	Sendix SIL 7014FS2 (Shaft)	SinCos
--	-----------------------------------	---------------



Ex protection and Functional Safety in one device.

The incremental encoders 7014FS2 of the Sendix SIL family are suited for use in safety-related applications up to SIL2 acc. to EN 61800-5-2 or PLd to EN ISO 13849-1.

In addition, these devices ensure Ex protection in a compact 70 mm housing out of seawater-resistant aluminium.



Ex approval



Safety-Lock™



High rotational speed



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor



Seawater-resistant

Functional Safety

- Encoder with individual certificate from IFA / TÜV
- Suitable for applications up to SIL2 acc. to EN 61800-5-2
- Suitable for applications up to PLd acc. to EN ISO 13849-1
- With incremental SinCos tracks
- Certified mechanical mounting + electronic

Explosion protection

- "Flameproof-enclosure" version
- ATEX with EC type examination certificate
- IECEx with Certificate of Conformity (CoC)

Order code 8.7014 FS2 . 1 XXX . XXXX . XXXX
Shaft version Type a b c d e f

a Flange 1 = clamping-synchronous flange, IP67 ø 70 mm [2.76"]	c Output circuit / Power supply 1 = SinCos / 5 V DC 2 = SinCos / 10 ... 30 V DC	e Pulse rate 1024, 2048 <i>optional on request - special cable length</i>
b Shaft (ø x L) 2 = 10 x 20 mm [0.39 x 0.79"], with flat 1 = 12 x 25 mm [0.47 x 0.98"], with keyway for 4 x 4 mm [0.16 x 0.16"] key	d Type of connection 1 = axial cable, 2 m [6.56'] PUR 2 = radial cable, 2 m [6.56'] PUR A = axial cable, length > 2 m [6.56'] B = radial cable, length > 2 m [6.56']	f Cable length in dm ¹⁾ 0050 = 5 m [16.40'] 0100 = 10 m [32.81'] 0150 = 15 m [49.21']

Accessories – Safety control		Order-No.
Safety-M, basic modules	Speed monitoring for 1 axis	8.MS1.000
	Speed monitoring for 2 axes (analogue inputs optional)	8.MS2.XXX

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology
 You will find an overview of our systems and components for Functional Safety in the safety technology section or under www.kuebler.com/safety

1) Not applicable with connection types 1 and 2

Incremental Encoders

Standard ATEX, SIL2 / PLd, optical	Sendix SIL 7014FS2 (Shaft)	SinCos
--	-----------------------------------	---------------

Technical data

Explosion protection ATEX	
EC type-examination certificate	PTB09 ATEX 1106 X
Category (gas)	II 2 G Ex d IIC T4 - T6 Gb
Category (dust)	II 2D Ex tb IIIC T135°C - T85°C Db IP6x
Directive 94/9/EC	EN 60079-0: 2009; EN 60079-1: 2007; EN 60079-31: 2009

Explosion protection IECEx	
Certificate of Conformity (CoC)	IECEx PTB 13.0026 X
Category (gas)	Ex d IIC T4 - T6 Gb
Category (dust)	Ex tb IIIC T135°C - T85°C Db IP6x
IECEx	IEC 60079-0:2007; IEC 60079-1:2007; IEC 60079-31:2008

Notes regarding "Functional Safety"

These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.

Additional functions can be found in the operating manual.

Safety characteristics	
Relevant standards	EN ISO 13849-1 / EN 61800-5-2, EN 61508
Classification	PLd / SIL2
System structure	2 channel (Cat. 3 / HFT = 1)
PFH_d value ¹⁾	2.16 x 10 ⁻⁸ h ⁻¹
Proof-test interval	20 years

Mechanical characteristics	
Max. speed	continuous 6 000 min ⁻¹
Starting torque – at 20°C [68°F]	< 0.05 Nm
Moment of inertia	4.0 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial 80 N axial 40 N
Weight	approx. 1.3 kg [45.86 oz]
Protection acc. to EN 60529	IP67
Working temperature range	-40°C ... +60°C [-40 ... +140°F]
Materials	shaft stainless steel flange / housing seawater-resistant Al, type AISiMgMn (EN AW-6082) (stainless steel on request) cable PUR
Shock resistance acc. EN 60068-2-27	500 m/s ² , 11 ms
Vibration resistance acc. EN 60068-2-6	200 m/s ² , 10 ... 150 Hz

Electrical characteristics	
Power supply	10 ... 30 V DC
Current consumption (no load)	max. 45 mA
Reverse polarity protection for power supply (+V)	yes
CE compliant acc. to	EMC guideline 2004/108/EC ATEX guideline 94/9/EC Machinery directive 2006/42/EC
RoHS compliant acc. to	guideline 2002/95/EC

SinCos interface	
Max. frequency -3dB	400 kHz
Signal level	1 Vpp (± 10%)
Short circuit proof	yes ²⁾
Pulse rate	1024 / 2048 ppr

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)							
1, 2	1, 2, A, B	Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	\perp
		Cable marking:	6	1	7	8	9	10	shield

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- A, \bar{A} : Cosine signal
- B, \bar{B} : Sine signal
- \perp : Plug connector housing (Shield)

1) The specified value is based on a diagnostic coverage of 90%, that must be achieved with an encoder evaluation unit.

The encoder evaluation unit must meet at least the requirements for SIL2.

2) Short-circuit with 0 V or output, only one channel at a time, supply voltage correctly applied

Incremental Encoders


Standard ATEX, SIL2 / PLd, optical	Sendix SIL 7014FS2 (Shaft)	SinCos
--	-----------------------------------	---------------

Dimensions

Dimensions in mm [inch]

Clamping-synchronous flange, \varnothing 70 [2.76]
Shaft type 1 with axial cable outlet

- 1 6 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

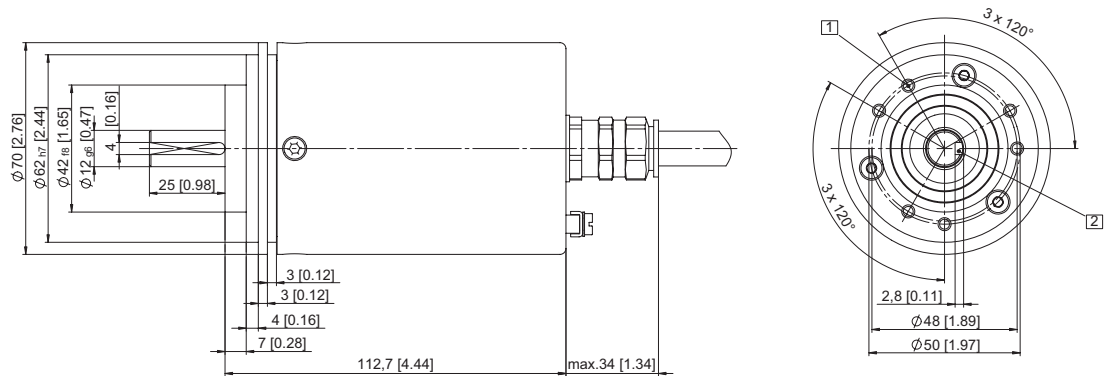

Clamping-synchronous flange, \varnothing 70 [2.76]
Shaft type 2 with radial cable outlet

- 1 6 x M4, 10 [0.39] deep

